Product Datasheet

60mm ∅ Ultracapacitors – weldable type

- Rated voltage 3VDC
- 3000F up to 5000F capacitance
- Ultra-low ESR, especially 'P' type cell
- Long life with multimillion cycles
- Excellent DC life performance
- Laser-weldable posts
- Very high energy and power density



ELECTRICAL SPECIFICATIONS				
Type	**C60W-3R0-3000**	**C60W-3P0-3000**	**C60W-3R0-3400**	**C60W-2R7-5000**
Rated Voltage V_R	3.00 V	3.00 V	3.00 V	2.70 V
Surge Voltage V_S[1]	3.10 V	3.10 V	3.10 V	2.80 V
Rated Capacitance C[2]	3000 F	3000 F	3400 F	5000 F
Capacitance Tolerance[3]	0% / +20%	0% / +20%	0% / +20%	-0% / +20%
ESR[2] (DC)	<0.23 mΩ	<0.15 mΩ	<0.24 mΩ	<0.25 mΩ
ESR[2] (AC, 1 kHz)	<0.2 mΩ	<0.12 mΩ	<0.21 mΩ	<0.22 mΩ
Leakage Current I_L[4]	<12 mA	<12.0 mA	<12 mA	<12 mA
Self-discharge Rate[5]	<20%	<20%	<20%	<20%
Constant Current (ΔT = 15°C)[6]	145 A	180 A	142 A	136 A
Max Current I_{Max}[7]	2.8 kA	3.1 kA	2.8 kA	3.0 kA
Short Current I_S[8]	13 kA	20.0 kA	12.5 kA	10.8 kA
Stored Energy E[9]	3.75 Wh	3.75 Wh	4.25 Wh	5.1 Wh
Energy Density E_d[10]	7.8 Wh/kg	7.7 Wh/kg	8.7 Wh/kg	10.1 Wh/kg
Usable Power Density P_d[11]	9.8 kW/kg	14.7 kW/kg	9.2 kW/kg	6.9 kW/kg
Matched Impedance Power Density P_{dMax}[12], 10 Hz ESR	20.5 kW/kg	30.7 kW/kg	19.1 kW/kg	14.4 kW/kg
Matched Impedance Power Density P_{dMax}[12], 1 kHz ESR	23.5 kW/kg	38.3 kW/kg	21.9 kW/kg	16.4 kW/kg

THERMAL CHARACTERISTICS				
Type	**C60W-3R0-3000**	**C60W-3P0-3000**	**C60W-3R0-3400**	**C60W-2R7-5000**
Working Temperature	-40 ~ 65°C			
Storage Temperature[13]	-40 ~ 55°C			
Thermal Resistance R_{Th}[14]	3.1 K/W	3.1 K/W	3.1 K/W	3.2 K/W
Thermal Capacitance C_{Th}[15]	575 J/K	584 J/K	565 J/K	575 J/K

LIFETIME CHARACTERISTICS				
Type	**C60W-3R0-3000**	**C60W-3P0-3000**	**C60W-3R0-3000**	**C60W-2R7-5000**
DC Life at High Temperature[16]	1500 hours			
DC Life at RT[17]	10 years			
Cycle Life[18]	Multimillion cycles			
Shelf Life[19]	4 years			

SAFETY & ENVIRONMENTAL SPECIFICATIONS				
Type	**C60W-3R0-3000**	**C60W-3P0-3000**	**C60W-3R0-3000**	**C60W-2R7-5000**
Safety	RoHS, REACH, UL810A			
Vibration	IEC 60068-2-64 ISO 16750-3 (Table 12)			
Shock	IEC 60068-2-27, 100g 6ms			


All Rights Reserved

PHYSICAL PARAMETERS

Type		C60W-3R0-3000	C60W-3P0-3000	C60W-3R0-3000	C60W-2R7-5000
Mass M		478 g	489 g	490 g	505 g
Terminals		Weldable[20]	Weldable[20]	Weldable[20]	Weldable[20]
Dimensions[21]	Height L	138 mm	138 mm	138 mm	138 mm
	Diameter	60 mm	60 mm	60 mm	60 mm


NOTES:

1. Surge voltage V_S: Absolut maximum voltage, non-repetitive. The duration must not exceed 1 second.
2. Capacitance C: The test current is 0.075 A/F, if the calculated current is >100A, then apply 100A.

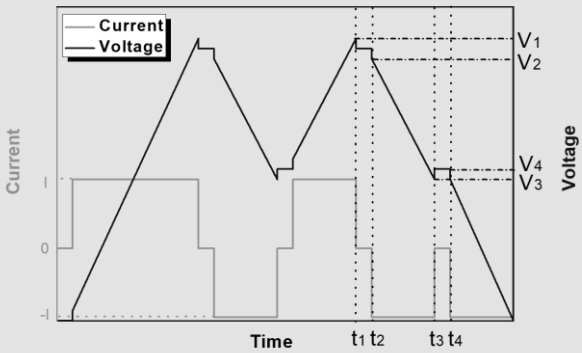

$V_1=2V_3=V_R$ $t_2-t_1=t_4-t_3=0.1$ s
$C=I*(t_3-t_2)/(V_2-V_3)$ $ESR=(V_4-V_3)/I$

3. Capacitance tolerance: Typical tolerance is +5%~+10%.
4. Leakage current measurement procedure: 1) Charge the capacitor to the V_R with a constant current (0.075 A/F, if the calculated current is >100A, then apply 100A). 2) Hold the voltage at V_R for 72h. 3) The current to maintain V_R after 72 h is the leakage current.
5. Self-discharge rate measurement procedure: 1) Charge the capacitor to V_R with a constant current (0.075 A/F, if the calculated current >100A, then apply 100A). 2) Hold the voltage at V_R for 3h. 3) Floating for 72h. 4) Measure the voltage after 72 h.
6. Max constant working current: $I_{MCC} = \sqrt{\Delta T/(ESR * R_{Th})}$
7. Max current: $I_{Max} = 0.5C * V_R/(\Delta t + ESR * C)$, discharge from V_R to V_R /2 in 1 second.
8. Short current: $I_S = V_R/ESR$
9. Stored energy: $E = 0.5C * V^2/3600$
10. Energy density: $E_d = E/M$
11. Usable power density: $P_d = (0.12V_R^2/ESR)/M$
12. Matched impedance power density: $P_{dMax} = (0.25V_R^2/ESR)/M$
13. Storage temperature: Storage in discharge state.
14. Thermal resistance: $R_{Th} = \Delta T/P$, where P = ESR * I^2
15. Thermal capacitance is indicated for the whole product.
16. DC life at high temperature: Hold the capacitor charged at rated voltage at 65°C for 1500h. The capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.
17. DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.
18. Cycle life: The number of cycles depends on the charging and discharging characteristics.
19. Shelf life: Discharged and no load applied at RT.
20. The welding depth should be larger than 0.8 mm
21. Dimensions of the Ø60mm cells:

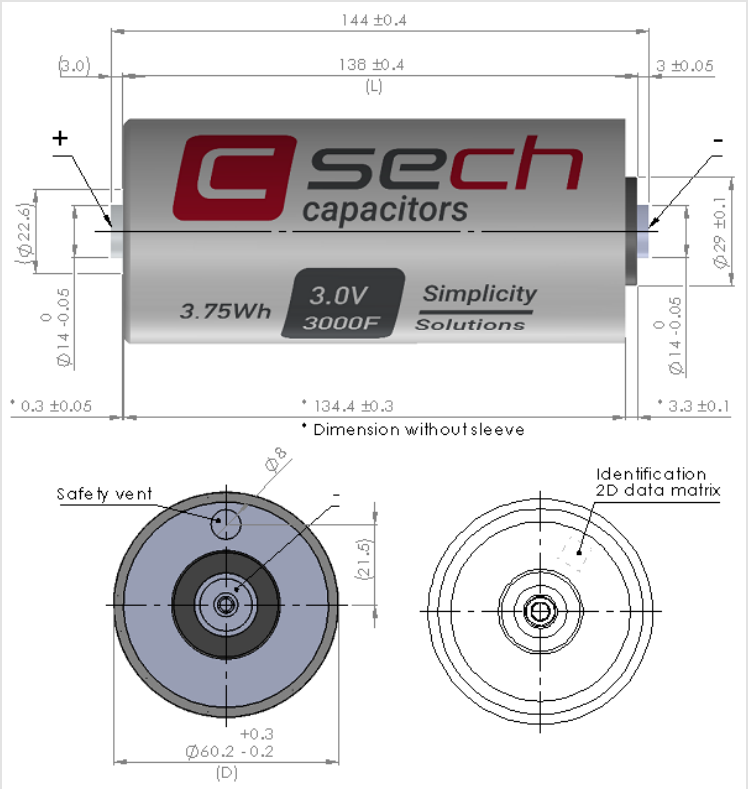

Standard markings:
+ Name of manufacturer, part number, serial number
+ Rated voltage and capacitance, negative and positive terminals, warning marking
+ Stored energy in watt-hours

Mounting recommendations:
+ Mounting without applying undue mechanical stress on the terminals
+ Provide adequate spacing in between cells to secure required insulation strength
+ Provide clearance around the safety vent and do not position anything above the safety vent that may be damaged in an event of vent rupture

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.

All Rights Reserved