

Product Datasheet

PSS Module

- Rated voltage 144VDC
- 63F capacitance
- High peak current due to ultra-low ESR
- Laser welded connections
- IP69, intrinsically safe
- Monitoring of all cell voltages, active cell balancing
- Evaluation of module data and adaptation of module parameters via CAN possible
- Fixation to equipment according customer request



ELECTRICAL SPECIFICATIONS

Type	M33W-144-P063
Rated Voltage V_R	144.00 V
Surge Voltage V_S^1	148.80 V
Rated Capacitance C^2	63 F
Capacitance Tolerance ³	0% / +20%
ESR ² (DC 10Hz)	<9.5 mΩ
Leakage Current I_L^4	<35 mA
Maximum Continuous Current ⁵ ($\Delta T = 15^\circ C$)	171 A _{RMS}
Maximum Continuous Current ⁵ ($\Delta T = 40^\circ C$)	280 A _{RMS}
Max Current I_{Max}^6	2.8kA
Short Current I_S^7	15kA
Voltage balancing current at V_R	20... 400 mA
Stored Energy E^8	180 Wh
Energy Density E_d^9	2.7 Wh/kg
Usable Power Density P_d^{10}	4.0 kW/kg
Impedance Match Power Density P_{dMax}^{11} , 1kHz ESR	9.3 kW/kg

THERMAL CHARACTERISTICS

Type	M33W-144-P063
Working Temperature	-40 ~ 65°C
Storage Temperature ¹²	-40 ~ 70°C
Thermal Resistance R_{Th}^{13} ; active air cooling	0.052°C/W
Thermal Capacitance C_{Th}^{14}	23.4 kJ/°C
Fan voltage V_{FAN}	24 VDC
Fan power, continuous P_{FAN}	60 W

LIFETIME CHARACTERISTICS

Type	M33W-144-P063
DC Life at High Temperature ¹⁵	1500 hours
DC Life at RT ¹⁶	10 years
Cycle Life ¹⁷	1'000'000 cycles
Shelf Life ¹⁸	4 years

SAFETY & ENVIRONMENTAL SPECIFICATIONS

Type	M33W-144-P063
Protection degree	Module: IP6k9k; Fan: IP68; IEC 60529
Vibration	ISO 16750-3 Table 12

Shock	IEC 60068-2-27; test Ea / 15g; 11ms; 18x
Bump	IEC 60068-2-29; test Eb / 25g; 6ms; 6000x
EMC	EN 50121-3-2: 07.2016
Rated insulation voltage (maximum series voltage)	1500 Vdc

INTERFACES

Type	M33W-144-P063
Control voltage for internal module electronics ¹⁹	24 VDC
Control power permanent	5 W
Control voltage IO for error signal	≤24 VDC
Error signal, open-collector	≤10 mA
CAN	CAN Standard (CAN 2.0A)

PHYSICAL PARAMETERS

Type	M33W-144-P063						
Mass M (without / with fan)	63 / 66 kg						
Dimensions	<table> <tr> <td>Length (without / with fan)</td> <td>662 / 753 mm</td> </tr> <tr> <td>Width</td> <td>510</td> </tr> <tr> <td>Height</td> <td>224 mm</td> </tr> </table>	Length (without / with fan)	662 / 753 mm	Width	510	Height	224 mm
Length (without / with fan)	662 / 753 mm						
Width	510						
Height	224 mm						

CONNECTORS – COMMUNICATION

Connector: M12 female 8 poles (A coded)

PIN	SIGNAL	DESCRIPTION
1	+24V IO	Control voltage power supply for error signal
2	Error signal	Open-collector, low: Error / high: OK, max 10mA
3	0V GND IO ²¹	Reference ground for control voltage IO and error signal
4	CAN GND ²¹	CAN GND
5	CAN Low	CAN Low
6	CAN High	CAN High
7	+24V	Control voltage power supply
8	0V GND ²¹	Reference ground for control voltage

CONNECTORS - CPOWER

Connectors: Amphenol SurLock Plus

PIN	SIGNAL	DESCRIPTION
1	Power connection (+)	Amphenol SLP IR C T P C O(R) 0
2	Power connection (-)	Amphenol SLP IR C T P C B 3
GND	Housing	M8 (max. 15Nm)

CONNECTORS - FAN


Connector: DT04-2P-L012

PIN	SIGNAL	DESCRIPTION
1	0V FAN	Reference ground for fan power supply
2	24V FAN	Fan power supply

DESIGN AND DIMENSIONS:

Type

M33W-144-P063

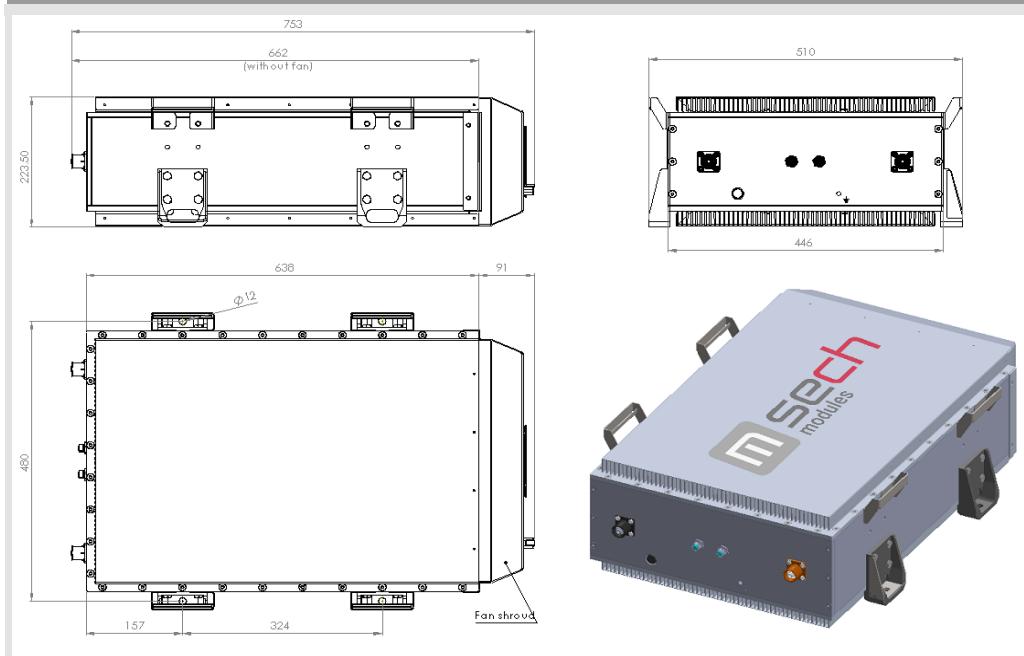

Standard markings:

- Name of manufacturer
- Part number and serial number
- Rated voltage and capacitance
- Negative and positive terminals
- Warning marking
- Stored energy in watt-hours

NOTES:

1. Surge voltage V_s : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
2. Capacitance C and ESR DC: The test current is 100A.
3. Capacitance tolerance: Typical tolerance is $\pm 5\% \sim \pm 10\%$.
4. Leakage current measurement procedure: 1) Charge the capacitor to the V_R with a constant current of 100A. 2) Hold the voltage at V_R for 72h. 3) The current to maintain V_R after 72 h is the leakage current. Leakage current may be greater if balancing is activated.
5. Max constant working current: $I_{MCC} = \sqrt{\Delta T / (ESR * R_{Th})}$
6. Max current: $I_{Max} = 0.5C * V_R / (\Delta t + ESR * C)$, discharge from V_R to $V_R/2$ in 1 second.
7. Short current: $I_5 = V_R / ESR$
8. Stored energy: $E = 0.5C * V^2 / 3600$
9. Energy density: $E_d = E / M$
10. Usable power density: $P_d = 0.125V_R^2 / (ESR * M)$
11. Impedance match power density: $P_{dMax} = 0.25V_R^2 / (ESR * m)$
12. Storage temperature: Storage in discharge state.
13. Thermal resistance: $R_{Th} = \Delta T / P$, where $P = ESR * I_2$
14. Thermal capacitance is indicated for the whole module.
15. DC life at high temperature: Hold the capacitor charged at rated voltage at $65^\circ C$ for 1500h. The capacitance shall be $>80\%$ of the rated value, the ESR shall be $<200\%$ of the rated value.
16. DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be $>80\%$ of the rated value, the ESR shall be $<200\%$ of the rated value.
17. Cycle life: Charge and discharged the capacitor in the range between V_R and $V_R/2$. 5 seconds waiting period between charge and discharge. The constant test current is 100A.
18. Shelf life: Discharged and no load applied at RT.
19. See detailed CMS datasheet and user manual.
20. The electronics can alternatively be supplied from the module. In this case CAN and error output are not available.
21. Do not interconnect pins 2, 5, and 8; maximum permissible voltage between pins 2, 5, 8 and PE = 42V.

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document