

Product Datasheet

96V 93F ultracapacitor module

- Rated voltage 96VDC 93F capacitance
- High cycle life of 1 million cycles
- Laser welded internal connections
- Robust and vibration proof design
- Passive cell balancing
- Temperature monitoring



ELECTRICAL SPECIFICATIONS

Type	M13W-096-0093
Rated Voltage V_R	96 V
Surge Voltage V_S^1	99.2 V
Rated Capacitance C^2	93 F
Capacitance Tolerance ³	0% / +20%
DC ESR ²	<10 mΩ
Leakage Current I_L^4	<50mA
Constant Current ($\Delta T = 15^\circ C$) ⁵	62 A
Max Current I_{Max}^6	2.3 kA
Short Current I_S^7	9.6 kA
Stored Energy E^8	119Wh
Energy Density E_d^9	6 Wh/kg
Usable Power Density P_d^{10}	5.5 kW/kg
Matched Impedance Power Density P_{dMax}^{11}	11.5 kW/kg

THERMAL CHARACTERISTICS

Type	M13W-096-0093
Working Temperature	-40 ~ 65 °C
Storage Temperature ¹²	-40 ~ 70 °C
Thermal Resistance R_{Th}^{13}	0.4 °C/W
Thermal Capacitance C_{Th}^{14}	21'000 J/°C

LIFETIME CHARACTERISTICS

Type	M13W-096-0093
DC Life at High Temperature ¹⁵	1500 hours
DC Life at RT ¹⁶	10 years
Cycle Life ¹⁷	1'000'000 cycles
Shelf Life ¹⁸	4 years

SAFETY & ENVIRONMENTAL SPECIFICATIONS

Type	M13W-096-0093
Safety	RoHS, REACH
Vibration	ISO 16750-3 Table14
Shock	IEC60068-2-28, 29

MONITORING AND CELL VOLTAGE MANAGEMENT


Type	M13W-096-0093
------	---------------

Internal Temperature Sensor	2x NTC 10kΩ @25°C
Temperature Interface	Analog
Connector	Harting Han 8D male
Cell Voltage Monitoring and Management	Passive

PHYSICAL PARAMETERS	
Type	M13W-096-0093
Mass M	20.1 kg
Terminals	M10 ¹⁹ (Option: Harting connectors, see picture)
Dimensions ²⁰ Length	520 mm
Width	260 mm
Height	185 mm


NOTES:

- Surge voltage V_S : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.075 A/F, if the calculated current is >100A, then apply 100A.

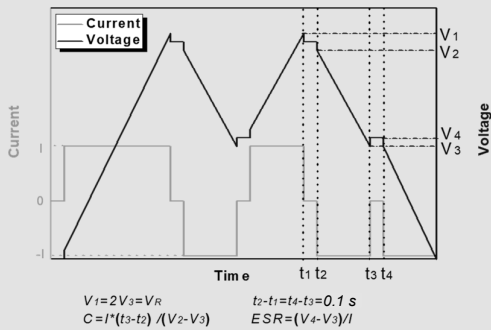

- Capacitance tolerance: Typical tolerance is +5%~+10%.
- Leakage current measurement procedure: 1) Charge the capacitor to the V_R with a constant current (0.075 A/F, if the calculated current is >100A, then apply 100A). 2) Hold the voltage at V_R for 72h. 3) The current to maintain V_R after 72 h is the leakage current.
- Max constant working current: $I_{MCC} = \sqrt{\Delta T / (ESR \cdot R_{Th})}$
- Max current: $I_{Max} = 0.5C \cdot V_R / (\Delta t + ESR \cdot C)$, discharge from V_R to $V_R/2$ in 1 second.
- Short circuit current: $I_S = V_R / ESR$
- Stored energy: $E = 0.5C \cdot V^2 / 3600$
- Energy density: $E_d = E / M$
- Usable power density: $P_d = (0.12V_R^2 / ESR) / M$
- Matched impedance power density: $P_{dMax} = (0.25V_R^2 / ESR) / M$
- Storage in discharge state.
- Thermal resistance: $R_{Th} = \Delta T / P$, where $P = ESR \cdot I^2$
- Thermal capacitance is indicated for the whole module.

- DC life at high temperature: Hold the capacitor charged at rated voltage at 65°C for 1500h. The capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value. DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.
- Cycle life: Charge and discharged the capacitor in the range between V_R and $V_R/2$. 5 seconds waiting period between charge and discharge. The constant test current is 0.075 A/F (if the calculated current >100A, then apply 100A).
- Shelf life: Discharged and no load applied at RT.
- The maximum torque is 25Nm
- Dimensions:

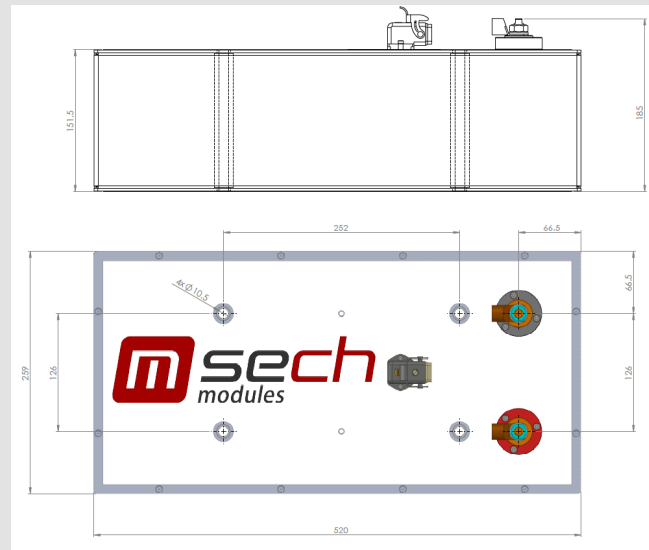

Notes:

Standard markings:

- + Name of manufacturer, part number, serial number
- + Rated voltage and capacitance, negative and positive terminals, warning marking
- + Stored energy in watt-hours

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.