

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **3 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C08S-3R0-0003
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	3 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	45 mΩ (40 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	70 mΩ (60 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.010 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	3.7 A
Usable Continuous Current $I_S$ <sup>6</sup>	1.3A
Stored Energy $E$ <sup>7</sup>	3.75 mWh
Energy Density $E_d$ <sup>8</sup>	2.34 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	20.1 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	135 K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C08S-3R0-0003
Mass M	1.6 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	8.0 mm
Length L + β max.	20.0 mm + 1.5
Lead distance P	3.5 mm
Lead diameter d	0.6 mm

#### DIMENSIONS

Type	C08S-3R0-0003
------	---------------

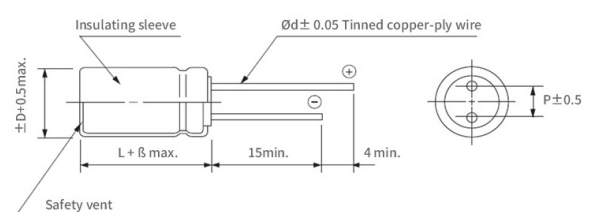

Basic characteristics and Notes of our small cells - see page 9

# Product Datasheet

## Small cell ultracapacitor – solderable type

- **5 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



### PRODUCT SPECIFICATION


Type	C10S-3R0-0005
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	5 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	40 mΩ (27 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	45 mΩ (39 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.015 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	6.1 A
Usable Continuous Current $I_S$ <sup>6</sup>	1.6A
Stored Energy $E^7$	6.25 mWh
Energy Density $E_d$ <sup>8</sup>	2.72 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	21.7 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	76K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

### PHYSICAL PARAMETER

Type	C10S-3R0-0005
Mass M	2.3 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	10.0 mm
Length L + β max.	20.0 mm +2
Lead distance P	5.0 mm
Lead diameter d	0.6 mm

### DIMENSIONS

Type	C10S-3R0-0005
------	---------------

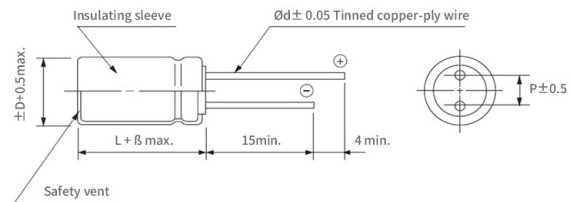

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **10 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C10S-3R0-0010
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	10 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	25 mΩ (16 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	40 mΩ (30 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.030 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	10.7 A
Usable Continuous Current $I_S$ <sup>6</sup>	2.5A
Stored Energy $E^7$	12.5 mWh
Energy Density $E_d$ <sup>8</sup>	3.57 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	16.1 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	39K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C10S-3R0-0010
Mass M	3.5 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	10.0 mm
Length L + β max.	30.0 mm +2
Lead distance P	5.0 mm
Lead diameter d	0.6 mm

#### DIMENSIONS

Type	C10S-3R0-0010
------	---------------

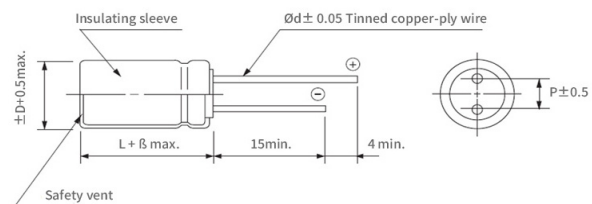

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **15 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C12S-3R0-0015
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	15 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	20 mΩ (16 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	35 mΩ (28 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.050 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	14.75 A
Usable Continuous Current $I_S$ <sup>6</sup>	2.9 A
Stored Energy $E^7$	18.7 mWh
Energy Density $E_d$ <sup>8</sup>	4.17 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	14.29 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	49K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C12S-3R0-0015
Mass M	4.5 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	12.5 mm
Length L + β max.	25.0 mm +2
Lead distance P	5.0 mm
Lead diameter d	0.6 mm

#### DIMENSIONS

Type	C12S-3R0-0015
------	---------------

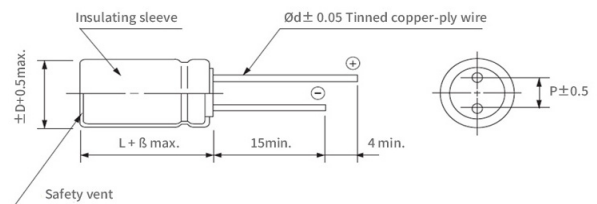

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **25 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C16S-3R0-0025
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	25 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	15 mΩ (12 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	25 mΩ (18 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.070 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	23.1 A
Usable Continuous Current $I_S$ <sup>6</sup>	3.4A
Stored Energy $E^7$	31 mWh
Energy Density $E_d$ <sup>8</sup>	4.17 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	12.0 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	34K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C16S-3R0-0025
Mass M	7.5 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	16.0 mm
Length L + β max.	25.0 mm +2
Lead distance P	7.5 mm
Lead diameter d	0.8 mm

#### DIMENSIONS

Type	C16S-3R0-0025
------	---------------

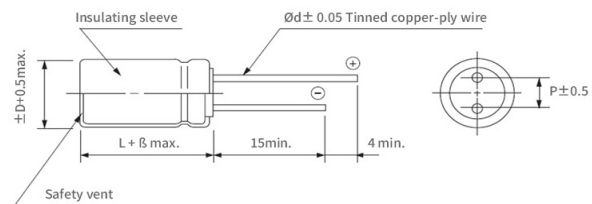

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **33 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C18S-3R0-0033
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	33 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	13 mΩ (11 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	20 mΩ (18 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.10 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	29.82 A
Usable Continuous Current $I_S$ <sup>6</sup>	5.4A
Stored Energy $E^7$	41 mWh
Energy Density $E_d$ <sup>8</sup>	4.08 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	11.14 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	26 K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C18S-3R0-0033
Mass M	10.1 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	18.0 mm
Length L + β max.	32.0 mm +2
Lead distance P	7.5 mm
Lead diameter d	0.8 mm

#### DIMENSIONS

Type	C18S-3R0-0033
------	---------------

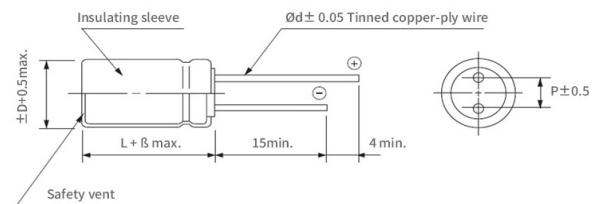

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **50 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C18S-3R0-0050
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	50 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	10 mΩ (8 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	15 mΩ (12 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.15 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	42.9 A
Usable Continuous Current $I_S$ <sup>6</sup>	5.5A
Stored Energy $E^7$	62.5 mWh
Energy Density $E_d$ <sup>8</sup>	4.63 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	11.1 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	22K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C18S-3R0-0050
Mass M	13.5 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	18.0 mm
Length $L + \beta$ max.	40.0 mm +2
Lead distance P	7.5 mm
Lead diameter d	0.8 mm

#### DIMENSIONS

Type	C18S-3R0-0050
------	---------------

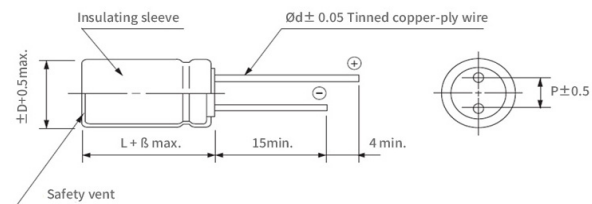

Basic characteristics and Notes of our small cells - see page 9

## Product Datasheet

### Small cell ultracapacitor – solderable type

- **100 F** capacitance
- Rated voltage **3.0 VDC**
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size



#### PRODUCT SPECIFICATION


Type	C22S-3R0-0100
Rated Voltage $V_R$ @ -40 - +65°C	3.0 V
Rated Voltage $V_R$ @ -40 - +85°C	2.5 V
Rated Capacitance $C^2$	100 F
Capacitance Tolerance <sup>3</sup>	-10% / +20%
ESR, 1kHz <sup>2</sup> (Typical Values)	8 mΩ (7 mΩ)
ESR, DC <sup>2</sup> (Typical Values)	13 mΩ (12 mΩ)
Leakage Current $I_L$ <sup>4</sup>	0.3 mA
Max Peak Current $I_{Max}$ <sup>5</sup>	65.2 A
Usable Continuous Current $I_S$ <sup>6</sup>	10.7A
Stored Energy $E^7$	125 mWh
Energy Density $E_d$ <sup>8</sup>	5.95 Wh/kg
Matched Impedance Power Density $P_{dMax}$ <sup>9</sup>	8.2 kW/kg
Thermal Resistance $R_{Th}$ <sup>10</sup>	10K/W
DC Life at HT @ 65°C <sup>11</sup>	1000 hours
DC Life at HT @ 85°C <sup>11</sup>	1000 hours @ max. 2.5V

#### PHYSICAL PARAMETER

Type	C22S-3R0-0100
Mass M	21.0 g
Terminals (wire leads)	Solderable <sup>16</sup>
Dimensions <sup>17</sup> Diameter D	22.0 mm
Length L + β max.	45.0 mm +3
Lead distance P	10.0 mm
Lead diameter d	1.0 mm

#### DIMENSIONS

Type	C22S-3R0-0100
------	---------------

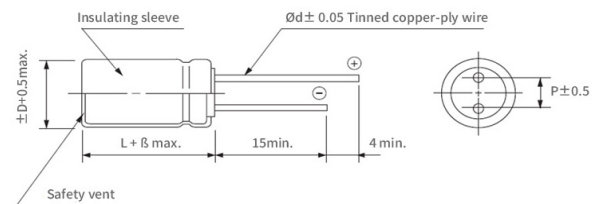

Basic characteristics and Notes of our small cells - see page 9




# Product Datasheet

## BASIC CHARACTERISTICS FOR ALL SMALL CELL TYPES

LIFETIME	DC Life at RT <sup>12</sup>	10 years
	Cycle Life <sup>13</sup>	500'000 cycles
	Shelf Life <sup>14</sup>	3 years
THERMAL	Operating Temperature	-40 ~ 65°C
	Temperature Characteristics at RT	Capacitance change within ±5% of value, ESR change within ±150% of value
SAFETY & ENVIRONMENTAL	Safety	RoHS, REACH and UL810
	Shock and vibration	MIL-STD-202, Method 213, Fig. 1, condition C; Method
	Warning	Do not overvoltage, do not reverse polarity


## NOTES FOR ALL SMALL CELL TYPES

- Surge voltage  $V_S$ : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.075 A/F, if the calculated current is >100A, then apply 100A.

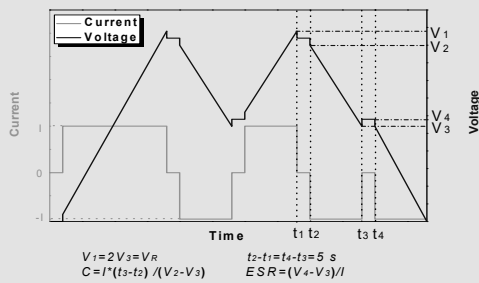

- Capacitance tolerance: Typical tolerance is +5%~+10%.
- Leakage current measurement procedure: 1) Charge the capacitor to the  $V_R$  with a constant current (0.075 A/F, if the calculated current is >100A, then apply 100A). 2) Hold the voltage at  $V_R$  for 72h. 3) The current to maintain  $V_R$  after 72 h is the leakage current.
- Max current:  $I_{Max} = 0.5C \cdot V_R / (\Delta t + ESR \cdot C)$ , discharge from  $V_R$  to  $V_R/2$  in 1 second.
- Max constant working current:  $I_{MCC} = \sqrt{\Delta T / (ESR \cdot R_{Th})}$
- Stored energy:  $E = 0.5C \cdot V^2 / 3600$
- Energy density:  $E_d = E / M$
- Matched impedance power density:  $P_{dMax} = (0.25V_R^2 / ESR) / M$
- Thermal resistance ( $\Delta T = 15^\circ C$ ):  $R_{Th} = \Delta T / P$ , where  $P = ESR \cdot I^2$
- DC life at high temperature HT: At 65°C hold the capacitor charged at rated voltage for 1000h or at 85°C at max. 2.5V for 1000h. The capacitance shall be >70% of the rated value, the ESR shall be <200% of the rated value.
- DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be >80% of the rated value, the ESR shall be <200% of the rated value.
- Cycle life: Charge and discharged the capacitor in the range between  $V_R$  and  $V_R/2$ . 5 seconds waiting period between charge and discharge. The constant test current is 0.075 A/F (if the calculated current >100A, then apply 100A).
- Storage temperature: Storage in discharge state, <35°C
- Shelf life: Stored uncharged at RT, <50% RH

### 16. Wave solder profile

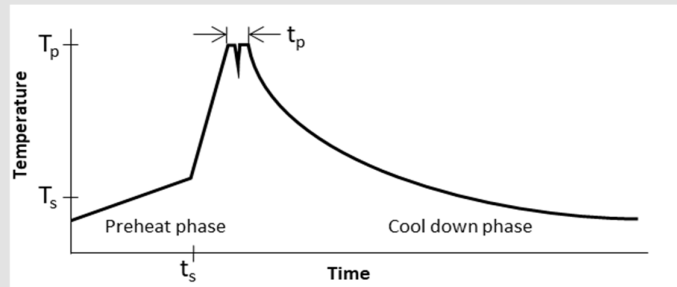

Profile feature	Standard SnPb	Pb free
Preheat/soak temperature $T_s$	100°C	100°C
Preheat/soak time $t_s$	60 s	60 s
Peak temperature $T_p$	220 – 260°C	250 – 260°C
Time to peak temperature $t_p$	10s max, 5s max/wave	10s max, 5s max/wave
Ramp-down rate	2-5 K/s	2-5 K/s
Time solder process (RT to RT)	4 min	4 min

### Notes:

#### Standard markings:

- + Name of manufacturer, part number, serial number
- + Rated voltage and capacitance, negative and positive terminals, warning marking
- + Stored energy in watt-hours

#### Mounting recommendations:

- + Mounting without applying undue mechanical stress on the terminals
- + Provide adequate spacing in between cells to secure required insulation strength
- + Provide clearance around the safety vent and do not position anything above the safety vent that may be damaged in an event of vent rupture

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.