


Product Datasheet

Small cell ultracapacitors – solderable type

- Rated voltage 3VDC
- 3 up to 100F capacitance
- High capacitance and low ESR
- High cycle life of 500'000 cycles
- Excellent DC life performance
- Anti-wetting design
- Small size

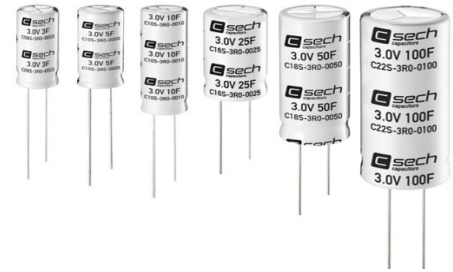

ELECTRICAL SPECIFICATIONS

Type	C08S-3R0-0003	C10S-3R0-0005	C10S-3R0-0010	C16S-3R0-0025	C18S-3R0-0050	C22S-3R0-0100
Rated Voltage V_R @ -40 - +65°C	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V	3.0 V
Rated Voltage V_R @ -40 - +85°C	2.5 V	2.5 V	2.5 V	2.5 V	2.5 V	2.5 V
Rated Capacitance C^2	3 F	5 F	10 F	25 F	50 F	100 F
Capacitance Tolerance ³	-10% / +20%	-10% / +20%	-10% / +20%	-10% / +20%	-10% / +20%	-10% / +20%
ESR, 1kHz ² (Typical Values)	45 mΩ (40 mΩ)	40 mΩ (27 mΩ)	25 mΩ (16 mΩ)	15 mΩ (12 mΩ)	10 mΩ (8 mΩ)	8 mΩ (7 mΩ)
ESR, DC ² (Typical Values)	70 mΩ (60 mΩ)	45 mΩ (39 mΩ)	40 mΩ (30 mΩ)	25 mΩ (18 mΩ)	15 mΩ (12 mΩ)	13 mΩ (12 mΩ)
Leakage Current I_L ⁴	0.010 mA	0.015 mA	0.030 mA	0.070 mA	0.15 mA	0.3 mA
Max Peak Current I_{Max} ⁵	3.7 A	6.1 A	10.7 A	23.1 A	42.9 A	65.2 A
Usable Continuous Current I_S ⁶	1.3A	1.6A	2.5A	3.4A	5.5A	10.7A
Stored Energy E^7	3.75 mWh	6.25 mWh	12.5 mWh	31 mWh	62.5 mWh	125 mWh
Energy Density E_d ⁸	2.34 Wh/kg	2.72 Wh/kg	3.57 Wh/kg	4.17 Wh/kg	4.63 Wh/kg	5.95 Wh/kg
Matched Impedance Power Density P_{dMax} ⁹	20.1 kW/kg	21.7 kW/kg	16.1 kW/kg	12.0 kW/kg	11.1 kW/kg	8.2 kW/kg

THERMAL CHARACTERISTICS

Type	C08S-3R0-0003	C10S-3R0-0005	C10S-3R0-0010	C16S-3R0-0025	C18S-3R0-0050	C22S-3R0-0100
Working Temperature	-40 ~ 65°C	-40 ~ 65°C	-40 ~ 65°C	-40 ~ 65°C	-40 ~ 65°C	-40 ~ 65°C
Temperature Characteristics	Capacitance change within ±5% of value at RT, ESR change within ±150% of value at RT					
Thermal Resistance R_{Th} ¹⁰	135 K/W	76K/W	39K/W	34K/W	22K/W	10K/W

LIFETIME CHARACTERISTICS

Type	C08S-3R0-0003	C10S-3R0-0005	C10S-3R0-0010	C16S-3R0-0025	C18S-3R0-0050	C22S-3R0-0100
DC Life at HT @ 65°C ¹¹	1000 hours					
DC Life at HT @ 85°C ¹¹	1000 hours @ max. 2.5V					
DC Life at RT ¹²	10 years					
Cycle Life ¹³	500'000 cycles					
Shelf Life ¹⁴	3 years					

SAFETY & ENVIRONMENTAL SPECIFICATIONS


Type	C08S-3R0-0003	C10S-3R0-0005	C10S-3R0-0010	C16S-3R0-0025	C18S-3R0-0050	C22S-3R0-0100
Safety	RoHS, REACH and UL810					
Shock and vibration	MIL-STD-202, Method 213, Fig. 1, condition C; Method 204 (acc. AEC-Q200)					

PHYSICAL PARAMETERS

Type	C08S-3R0-0003	C10S-3R0-0005	C10S-3R0-0010	C16S-3R0-0025	C18S-3R0-0050	C22S-3R0-0100
Mass M	1.6 g	2.3 g	3.5 g	7.5 g	13.5 g	21.0 g
Terminals (wire leads)	Solderable ¹⁶	Solderable ¹⁶	Solderable ¹⁶	Solderable ¹⁶	Solderable ¹⁶	Solderable ¹⁶
Dimensions ¹⁷	Diameter D	8.0 mm	10.0 mm	10.0 mm	18.0 mm	22.0 mm
	Length L	20.0 mm	20.0 mm	30.0 mm	25.0 mm	45.0 mm
	Lead distance P	3.5 mm	5.0 mm	5.0 mm	7.5 mm	7.5 mm
	Lead diameter d	0.6 mm	0.6 mm	0.6 mm	0.8 mm	0.8 mm


NOTES:

- Surge voltage V_s : Absolute maximum voltage, non-repetitive. The duration must not exceed 1 second.
- Capacitance C: The test current is 0.075 A/F, if the calculated current is $>100A$, then apply 100A.

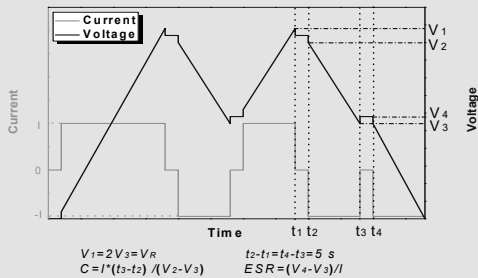


- Capacitance tolerance: Typical tolerance is +5%~+10%.
- Leakage current measurement procedure: 1) Charge the capacitor to the V_R with a constant current (0.075 A/F, if the calculated current is $>100A$, then apply 100A). 2) Hold the voltage at V_R for 72h. 3) The current to maintain V_R after 72 h is the leakage current.
- Max current: $I_{Max} = 0.5C \cdot V_R / (\Delta t + ESR \cdot C)$, discharge from V_R to $V_R/2$ in 1 second.
- Max constant working current: $I_{MCC} = \sqrt{\Delta T / (ESR \cdot R_{Th})}$
- Stored energy: $E = 0.5C \cdot V^2 / 3600$
- Energy density: $E_d = E / M$
- Matched impedance power density: $P_{dMax} = (0.25V_R^2 / ESR) / M$
- Thermal resistance ($\Delta T = 15^\circ C$): $R_{Th} = \Delta T / P$, where $P = ESR \cdot I^2$
- DC life at high temperature HT: At $65^\circ C$ hold the capacitor charged at rated voltage for 1000h or at $85^\circ C$ at max. 2.5V for 1000h. The capacitance shall be $>70\%$ of the rated value, the ESR shall be $<200\%$ of the rated value.
- DC life at RT: Hold the capacitor charged at rated voltage at room temperature RT, the capacitance shall be $>80\%$ of the rated value, the ESR shall be $<200\%$ of the rated value.
- Cycle life: Charge and discharged the capacitor in the range between V_R and $V_R/2$. 5 seconds waiting period between charge and discharge. The constant test current is 0.075 A/F (if the calculated current $>100A$, then apply 100A).
- Storage temperature: Storage in discharge state, $<35^\circ C$
- Shelf life: Stored uncharged at RT, $<50\%$ RH

- Wave solder profile

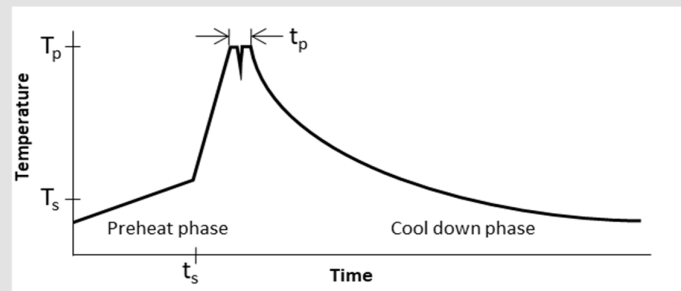

Profile feature	Standard SnPb	Pb free
Preheat/soak temperature T_s	100°C	100°C
Preheat/soak time t_s	60 s	60 s
Peak temperature T_p	220 – 260°C	250 – 260°C
Time to peak temperature t_p	10s max, 5s max/wave	10s max, 5s max/wave
Ramp-down rate	2-5 K/s	2-5 K/s
Time solder process (RT to RT)	4 min	4 min

- Dimensions:

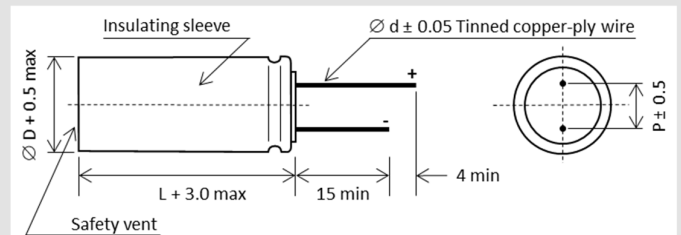

- Notes:

Standard markings:

- + Name of manufacturer, part number, serial number
 - + Rated voltage and capacitance, negative and positive terminals, warning marking
 - + Stored energy in watt-hours
- Mounting recommendations:
- + Mounting without applying undue mechanical stress on the terminals
 - + Provide adequate spacing in between cells to secure required insulation strength
 - + Provide clearance around the safety vent and do not position anything above the safety vent that may be damaged in an event of vent rupture

The contents of this document are subject to change without notice. SECH accepts no liability for the accuracy or credibility of the values and information contained in this document.